

Night Scout



u s e r ` s g u i d e


**AMERICAN
TECHNOLOGIES
NETWORK
CORP.**



90mm F 1.2 Lens for maximum clarity

Two 3 Volt batteries

± Diopter

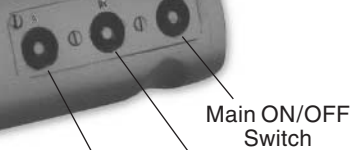

Built-in infra-red (IR) illuminator

IR illuminator ON/OFF Switch


Proximity Sensor ON/OFF Switch



Proximity Sensor

Battery light indicator

IR activity light indicator



Camera adapter

The information in this manual furnished for information use only, is subject to change without notice, is not to be construed as a commitment by ATN Corp.

ATN Corp. assumes no responsibility or liability for any errors or inaccuracies that may appear in this book.

©2001 ATN Corp. All right reserved.

APPLICATION

The Night vision Binocular is a complex optoelectronic system for individual use. The device consists of the objective lenses, eyepieces and the body. The body contains two 1st + Gen. image intensifier tubes assembled with an integrated high voltage power source and two three-volt battery housing. When installing the batteries one should keep in mind that the polarity of the batteries should coincide with the diagram on the body next to the battery housing cap.

Objective lens protective covers are intended to protect the objective lens from dust and scratches. They will also act as daylight filter allowing you to test the Binoculars in daylight or other bright light situations. The pin-holes in the center of the protective covers allow the user to check the operational capability of the device in daylight conditions.

NOTE: Do not test the scope in daylight conditions even with the daylight filter/lens caps on for more than ten (10) minutes.

SMART DIGITAL TECHNOLOGY

Smart Total darkness Technology finally provides the user total control in the hi-tech industry of night vision. The Smart Series night vision binoculars have been designed according to the latest computer technology. On board computer systems identify the users intention of looking through the Binoculars. When the binoculars are brought to the user's eyes, the binoculars will automatically turn on. When removed from the eyes the binoculars will turn off (you must engage the proximity sensor for this feature to work). The user will never have to worry about turning his or her binoculars on or off. Smart series binoculars automatically sense when they are no longer used and shut off and enter their sleep mode. Both the controls and buttons are digital. Even if your batteries are low don't worry the smart series will let you know.

Our Night Scout binoculars have a 3 button digital control panel that allows the user to easily engage the main power, Infra-red illuminator and the proximity sensor. Color coded LEDs let you know the mode of operation you are using.

1. ON/OFF indicator light - when power is ON, the LED is be green.
2. When the proximity sensor is activated the LED will change to red.
3. When IR is ON the LED is orange.

NOTE: You may notice a persistent green glow for up to five (5) minutes after you have turned the unit off. This is normal for the 1st Gen. light intensifier tube.

FOCUSING

To focus the Night Scout first you will need to adjust the diopters. Simply turn the diopters clockwise until they stop. Then, while looking through the diopters at an object, slowly turn the diopters back counter clockwise until the grain in the image is sharp.

NOTE: We suggest that you focus the diopters during, daylight with the daylight filters on.

INFRA-RED ILLUMINATION

Infra-red illuminators, or IR illuminators, are common in night vision. The IR light greatly enhances the performance of the Night Scout while remaining almost totally invisible to the naked eye. The IR illuminator on the Night Scout is located on the side of the unit. To turn the IR on, push the IR button and you will see an orange indicator light come on. It is important to remember that the IR illuminator is simply an infra red light source, and like any light source it may lose its efficiency over a great distance.

NOTE: The IR will automatically turn off when the unit's main power is turned OFF.

IR LOW BATTERY INDICATOR

The low battery indicator is another feature that is programmed into your “Smart” binoculars. If the batteries start losing voltage, LED “B” will start to pulse, it is time to change your batteries.

USING THE CAMERA ADAPTER (OPTIONAL)

To use your Night Scout with a 35mm camera or camcorder you will need the following:

- 1) If you plan to use a camcorder then your camcorder must have a MACRO feature. Most modern camcorders today have a MACRO feature built in.
- 2) If you plan to use a 35mm camera you will need a MACRO lens. If you don't have one we advise that you contact your local camera store.
- 3) You may or may not need a STEP-UP or STEP-DOWN ring in order to adapt the camera adapter to your lens.

NOTE: The camera adapter comes with 37-mm and 52-mm threads. If you need other sizes your local camera store should be able to help.

- Screw the camera adapter onto the front of the lens on your Video camera's lens or your 35-mm camera's lens.
- Loosen the three set screws on the camera adapter.
- Place the camera adapter over the Night Scout's eyepiece.
- Tighten the three set screws to fit snugly to the Night Scout's eyepiece
- You may need to focus the 35mm camera or video camera in combination with the Night Scout in order to get the sharpest possible image.
- We suggest that you find an open space to work in. Focus the Night Scout so that the scene is at its sharpest. For the best results you should disable the auto focus (if any) on either the 35-mm camera or the video camera and manually focus the 35-mm camera or the video camera. Once the image is in sharp, then simply adjust the Night Scout's front lens to change the focus.
- An important part to remember is that you are not taking a picture of an object that is far away from you, but you are actually taking a picture of a phosphorous screen of the Night Scout that is only 2-3 inches away.



OPERATION

- Take the binoculars out of the case.
- Install the batteries into the housing with the polarity order as shown on the binoculars. Battery Type: 3 Volt Lithium, #CR123A
- Press the button marked -/O to turn unit on with the protective lens covers still attached to the lenses. **Do not turn unit on in the daytime without the protective lens caps on.** You should see a green glow in the eyepieces.
- Observe the scene, and adjust the diopters for the optimal image clarity.

- You may now enter a dark environment or simply shut the lights off in order to darken the room.
- Next, remove the lens caps/daylight filters and observe the scene. You should readjust the diopters for maximum clarity. Remember the focus range of the binocular is 20' to infinity.
- The unit will turn on and off automatically when you bring it to or take away from your eyes. This is done by activating the proximity sensor. To activate the proximity sensor push the digital control marked "A". You will notice the green LED change to red when the sensor is on.
- In order to assure the proper functioning of the proximity sensor, make sure that the protective glass surface of the sensor is always clean. Adjust the digital features as needed.
- To increase battery life the LED diodes will go off after 10 seconds.
- Take your time learning about your "smart" binoculars. It will take practice to properly use the device. As you use these binoculars you will be able to improve your speed of focusing, as well as sharpness of image.
- Have fun and enjoy.

CLEANING THE EYEPIECE

You may need to clean the eyepiece of the Night Scout from time to time in order to guarantee top performance. When you receive your Night Scout you should check for dust on the eyepiece of the unit. First you will need to remove the eyepiece. To remove the eyepiece you will need to initially loosen 2 set screws that can be found on the base. Then unscrew the eyepiece counter-clockwise to remove it.

NOTE: *You do not have to remove the set screws completely, they are very small and easy to misplace.*

CAUTION: *Use only Photographic lens cleaning tissue on these surfaces. Be careful not to scratch or smudge any of these surfaces. When using compressed air to blow dust away, make sure to avoid inverting the can while spraying. This may cause frozen propellant to exit the can, which can result in serious problems of the glass and phosphor screen.*

STORAGE AND CARE

- If the device is not to be used for an extended period of time (more than 10 days) remove the battery.
- Avoid touching lenses. If fingerprints or traces of dirt or dust appear, clean surface with a Photographic lens cleaning tissue.
- Keep the lens cap/daylight filter on when not in use.
- The Night Scout is not harmful to the user or the environment.
- Do not disassemble except to clean the front lens and eyepiece: **it will void your warranty.**
- Evaluate the binoculars function by looking through it in a lit environment with the daylight filter lens cap on. Never use in daylight without the daylight filter lens cap on.
- Never point the Night Scout at a bright light source.
- Adverse atmospheric conditions such as fog, smog or haze and a lack of ambient light (moon or starlight) may diminish the effective viewing distance.
- Remove the rubber eye-cup from the Night Scout

TROUBLE SHOOTING

Q: Flashes, flickers, or clicking occur while operating

S: If it occurs within the first five minutes of inserting new batteries it is normal and the device will resume normal operation soon thereafter. If it occurs for more than 10 minutes contact for service instructions.

Q: Dark spots on screen.

S: These are either cosmetic blemishes in the intensifier tube or dust particles. Dust particles can be cleaned following instructions in "Cleaning Eyepiece" section.

Q: Screen becomes darker than in previous use.

S: Replace batteries. If the problem persists contact your dealer or other authorized service representative for service instructions.

Q: Image not clear.

S: Adjust objective lens and/or the eyepiece. Turn on IR.

FEATURES

- Great for hunting, camping, boating or surveillance
- Total darkness technology
- Automatic brightness control
- Built-in IR illuminator
- Manual focus
- Adjustable eyepiece
- High res. 1st+ Gen intensifier tube!
- Rugged and versatile design
- Light weight and comfortable
- Water and dust resistant
- Smart Technology - see description.
- Superb 5x lens system
- Soft case
- Two-year warranty (optional extended warranty).
- Camera Adaptability

SPECIFICATIONS

Magnification 5x
Intensifier Tube 1st+ Gen+; high res.
Lens System 6 (9) elements; F1. 2, 90mm
Field of View 20°
Resolution 40 lp/mm
Minimum Light Req 5×10^{-3} lux

Range of Focus 20' to ∞
Power Supply two 3 volt lithium
Battery Life 10-20 hours
Operating Temperatures -30°F to +110°F
Dimensions 225mm x 150mm x 60mm
Weight 1. 5kg.

2 YEAR PRODUCT WARRANTY

This product is guaranteed to be free from manufacturing defects in material and workmanship under normal use for a period of 2 (two) years from the date of purchase. In the event a defect that is covered by the foregoing warranty occurs during the applicable period stated above, ATN, at its option, will either repair or replace the product, and such action on the part of ATN shall be the full extent of ATN's liability, and the Customer's sole and exclusive remedy. This warranty does not cover a product (a) used in other than its normal and customary manner; (b) subjected to misuse; (c) subjected to alterations, modifications or repairs by the Customer or by any party other than ATN without prior written consent of ATN; (d) special order or "close-out" merchandise or merchandise sold "as-is" by either ATN or the ATN dealer; or (e) merchandise that has been discontinued by the manufacturer and either parts or replacement units are not available due to reasons beyond the control of ATN. ATN shall not be responsible for any defects or damage that in ATN's opinion is a result from the mishandling, abuse, misuse, improper storage or improper operation, including use in conjunction with equipment which is electrically or mechanically incompatible with or of inferior quality to the product, as well as failure to maintain the environmental conditions specified by the manufacturer. **CUSTOMER IS HEREBY NOTIFIED THAT OPERATION OF THE EQUIPMENT DURING DAYLIGHT HOURS OR UNDER ANY EXCESSIVE LIGHT CONDITIONS MAY PERMANENTLY DAMAGE THE INTERNAL COMPONENTS OF THE UNIT AND SAID DAMAGE WILL NOT BE COVERED UNDER THIS WARRANTY.** This warranty is extended only to the original purchaser. Any breach of this warranty shall be waived unless the customer notifies ATN at the address noted below within the applicable warranty period.

The customer understands and agrees that except for the foregoing warranty, no other warranties written or oral, statutory, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose, shall apply to the product. All such implied warranties are hereby and expressly disclaimed.

LIMITATION OF LIABILITY

ATN will not be liable for any claims, actions, suits, proceedings, costs, expenses, damages or liabilities arising out of the use of this product. Operation and use of the product are the sole responsibility of the Customer. ATN's sole undertaking is limited to providing the products and services outlined herein in accordance with the terms and conditions of this Agreement. The provision of products sold and services performed by ATN to the Customer shall not be interpreted, construed, or regarded, either expressly or implied, as being for the benefit of or creating any obligation toward any third party of legal entity outside ATN and the Customer; ATN's obligations under this Agreement extend solely to the Customer. **ATN's liability hereunder for damages, regardless of the form or action, shall not exceed the fees or other charges paid to ATN by the customer or customer's dealer. ATN shall not, in any event, be liable for special, indirect, incidental, or consequential damages, including, but not limited to, lost income, lost revenue, or lost profit, whether such damages were foreseeable or not at the time of purchase, and whether or not such damages arise out of a breach of warranty, a breach of agreement, negligence, strict liability or any other theory of liability.**

PRODUCT WARRANTY REGISTRATION

In order to validate the warranty on your product, ATN must receive a completed Product Warranty Registration Card for each unit. Please complete the form below and immediately mail it to our Service Center: ATN Corporation, 20 South Linden Ave., Suite 1B, South San Francisco CA 94080. Products qualifying for warranty repair will be either repaired or replaced within 10 business days of receipt of merchandise unless the customer is notified otherwise.

OBTAINING WARRANTY SERVICE

To obtain warranty service on your unit, take or send the product, postage paid, with a copy of your sales receipt to our service center, ATN Corporation at the address noted above. All merchandise must be fully insured with the correct postage; ATN will not be responsible for improper postage, or, missing or damaged merchandise during shipment.



For customer service and technical support, please contact
American Technologies Network Corp.

North American Office

20 S. Linden Ave. Suite 1B, South San Francisco, CA 94080
phone: 800-910-2862, 650-875-0130; fax: 650-875-0129

European Office

phone: 44(0)870-0111286, fax: 44(0) 845-3349142

The following countries can use our
toll free number 00 800 9102-8620

Austria, France, Germany, Holland, Italy, Spain, Sweden, Switzerland

www.atncorp.com

